


FLT

SUPPLIED AS STANDARD WITH A 150mm UPSTAND. A FULL RANGE OF CAMERA ACCESSORIES ARE AVAILABLE.

OPTION TO HAVE TOWER FULLY CABLE MANAGED.

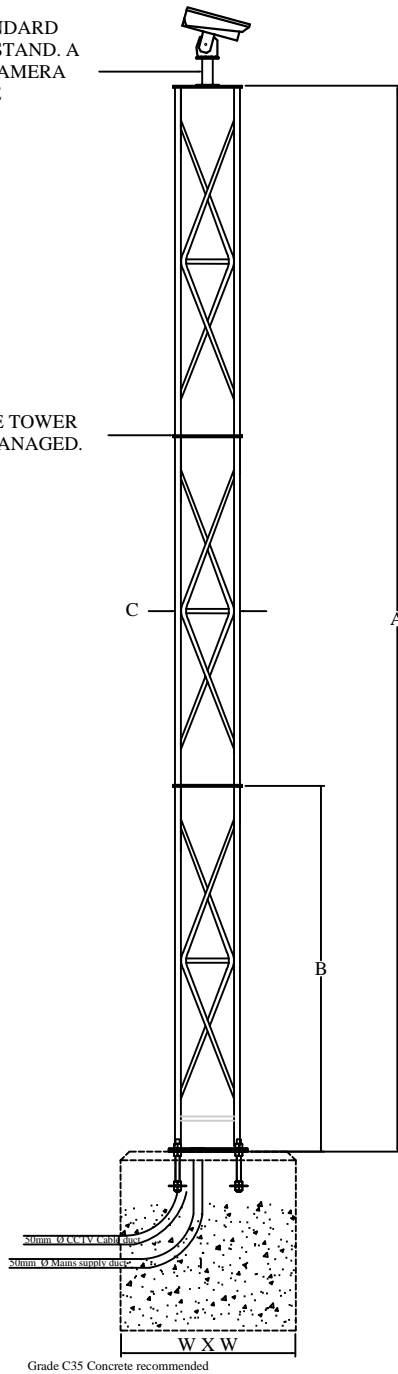

MANUFACTURING STANDARDS:

Structural Steelwork:
BS EN 10210-1:1994, BS EN 10210-2:1997

General Steelwork:
BS 1449:1991, BS 1387:1985, BS EN 10025:1993

Welding Procedures:
Comply with BS 5135:1984

Hot Dipped Galvanized:
BS EN 729:1971, BS EN ISO 1461:1999

Fasteners:
Grade 8.8 BS3692:2001, BS 4190:2001,
DIN 931, DIN 934

Design Wind Loadings:
Based on CP3 Chapter V Pt 2 (1972) &
BS 6399 Pt 2 (1997)

Paint Finishes:
BS 4800 & RAL colour range

PRODUCT CODE	HEIGHT	SECTION SIZE	TOWER WIDTH	BASEPLATE THICKNESS	WEIGHT KGS
	MTR				
	A	B	C		
FLT4	4	2000	370	12	63
FLT6	6	2000	370	12	85
FLT8	8	2000	370	12	107
FLT10	10	2000	370	12	129
FLT12	12	2000	370	15	151

All dimensions in the above table are in mm unless otherwise stated.